

TNP1

series



Product Segments


• Care Motion

General Features

| | |
|---|--------------------|
| Number of motors | 7 |
| Max. available buttons | 27 |
| Color | Black, grey, white |
| IP rating | IP66 |
| Safety key | Available |
| Operational temperature range | +5°C~+45°C |
| Control up to 7 channels in connection with TC8 | |
| Can be used as lock-out box | |
| Can hook on the rail | |

Drawing

Standard Dimensions
(mm)

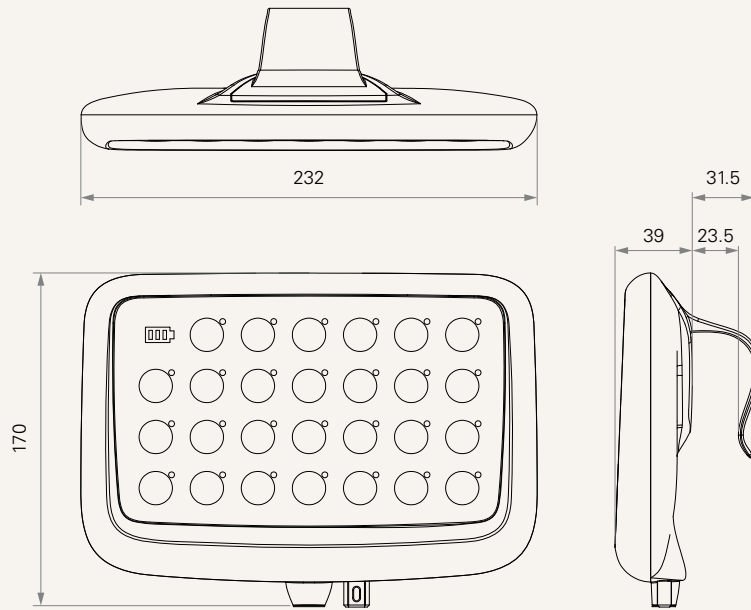


TNP1

Version: 20230525-F

| | | | |
|--------------------------|--|---|-------------|
| Plug | 1 = DIN 8P, 90°, for TC2 / TC3 2 = RJ 10P, 90° for TC1 4 = DIN 8P, 180°, for extension cable | 5 = RJ 10P, 180°, for TC6 / TC9 / extension cable A = Customized | |
| Color | 1 = Black | 2 = Pantone 428C | 3 = White S |
| IP Rating | 3 = IP66 | | |
| Lock | 0 = Without | 1 = With | |
| Button Definition | A = Customized | | |
| Cable Length (mm) | 1~6 = See page 4 | | |
| Control Box Type | 3 = With MCU + MCU control box | | |
| Buzzer | 1 = with | | |
| Hook Type | 1 = Standard | | |

Cable Length

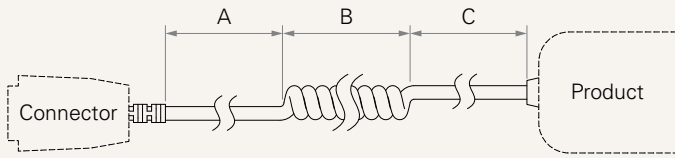

| Cable Section (mm) | | | |
|--------------------|------|-----|-----|
| CODE | A | B | C |
| 1 | 1000 | 300 | 200 |
| 2 | 1200 | 300 | 300 |
| 3 | 1400 | 300 | 400 |
| 4 | 2400 | 0 | 0 |
| 5 | 100 | 600 | 100 |
| 6 | 1000 | 200 | 200 |

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.